

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ :**G11B 17/22, 17/04****A1**

(11) International Publication Number:

WO 00/54270

(43) International Publication Date: 14 September 2000 (14.09.00)

(21) International Application Number: PCT/EP00/02178

(22) International Filing Date: 10 March 2000 (10.03.00)

(30) Priority Data:

199 10 670.3

11 March 1999 (11.03.99)

DE

(71) Applicant (for all designated States except US): KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(71) Applicant (for DE only): PHILIPS CORPORATE INTELLECTUAL PROPERTY GMBH [DE/DE]; Habsburgerallee 11, D-52066 Aachen (DE).

(72) Inventors; and


(75) Inventors/Applicants (for US only): KUNZE, Norbert [DE/DE]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MÜLLER, Stefan [DE/DE]; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: VOLMER, Georg; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).

(81) Designated States: JP, KR, US, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).

Published*With international search report.*

(54) Title: CHANGING GEAR

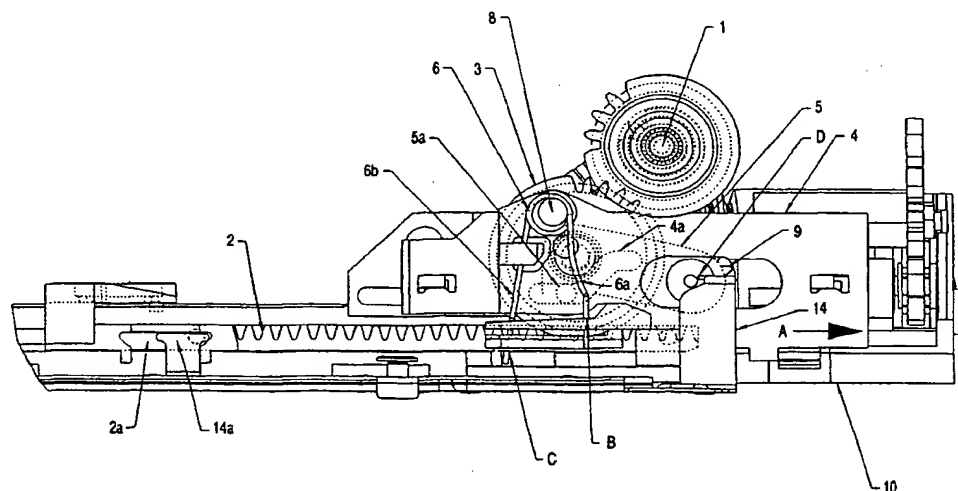

(57) Abstract

The invention relates to a device for playing and storing several disc-shaped data carriers for alternate operation, in particular CDs, CD-ROMs, and DVDs, with a playback unit serving for playing the data carrier and comprising substantially a base plate, a frame plate, and springs and dampers arranged therebetween, and a turntable arranged on the frame plate for accommodating the data carrier and a tensioning device for the data carrier, as well as a stacking unit for the intermediate storage of several data carriers and a loading unit for the bidirectional transport of the data carrier between the stacking unit and the playback unit and for moving the data carrier into and out of the device. A changing gear is provided which has two alternative outputs, the first output (2) being provided inter alia for the purpose of adjusting a control member (14) which can be displaced from an extreme position of the first output (2) by means of a further drive, such that an adjustment member (4) carries out the switching-over operation.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Changing gear.

The invention relates to a device for playing and storing several disc-shaped data carriers with changing facility, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and consisting substantially of a base plate, a frame plate, and springs and dampers arranged therebetween, a turntable arranged on
5 the frame plate and supporting the data carrier, and a tensioning device for the data carrier, with a stacking unit serving for the intermediate storage of several data carriers and a loading unit serving for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device.

The present state of the art provides that an individual motor is used for each
10 of these mechanisms, or a changing gear is adjusted by hand or by means of a separate, small servomotor such that the motor power of a motor is switched over to various drives. The use of a separate drive motor or a servomotor is expensive, and a gear switch by hand is not always practicable or is at the very least uncomfortable. It happens in many technical appliances that several different mechanisms are used which must not be operated
15 simultaneously.

It is an object of the invention to construct a drive system which controls itself without the help of servo drives such that the drive of two different mechanisms is rendered possible with only one motor.

The object according to the invention is achieved in that a changing gear is
20 provided which has two alternate drive outputs, the first drive output being designed inter alia for the function of adjusting a control member which can be moved further from an extreme position of the first drive output by means of a further drive, with the result that an adjustment member carries out the switching-over operation.

The advantage lies in the fact that it is possible to control two drive outputs by
25 means of only one motor drive via the changing gear, the switch-over between the two drive outputs taking place automatically by means of the adjustment member, and a manual operation is unnecessary.

In an embodiment of the device according to the invention, a changing wheel which is rotatably journaled about a drive wheel on a pivoting lever can be adjusted by means

of an adjustment member which is kept in or brought into a first end position by a spring, as a result of which the first output side of the changing gear is in engagement.

Advantageously, the drive wheel and the changing wheel are thus in continuous contact, and a mechanically simple, slide-type adjustment member suffices for
5 transmitting the drive force to the one drive output and to the other drive output alternately. The spring ensures in this case that the changing wheel is brought into the first end position and is retained there.

It is furthermore provided that the spring is constructed as a leg spring whose second leg is supported against a frame, whose turn or turns is/are supported on a mandrel of
10 the adjustment member, and whose first leg in said first end position is also supported against the adjustment member, such that the spring force acts with displacement effect on the adjustment member from the second leg only, while the adjustment member for the purpose of coupling the second output side of the changing gear by means of a control element, which acts on the first leg of the spring and compensates the contact force thereof on the adjustment
15 member, changes the balance of forces such that the spring force between the control element and the adjustment member becomes greater than the spring force on the second leg and the frame, with the result that the adjustment member moves towards the second end position until the second end position is reached, whereby the movement of the adjustment member is blocked, whereas the first leg of the spring is displaced further by the control element and is
20 thus lifted at one point from the adjustment member.

The automatic switch-over from the first to the second operating mode takes place automatically owing to this advantageous embodiment. This automatic switch-over takes place exactly the moment the spring force between the control element and the adjustment member becomes greater than the force of the second spring leg exerted on the
25 frame. The increase in the spring force between the control element and the adjustment member is achieved in a suitable manner through the movement of a component controlled by the first drive output side.

It is furthermore provided that the coupling region between the first output member and the control member is constructed such that the first output member and the
30 control member can move relative to one another in the direction of movement of the control member, and this clearance space is utilized for coupling and uncoupling the first drive output side.

The coupling region as provided here has the advantage that a simple coupling and uncoupling of the first output can take place without a complicated coupling between the drive member and the first output being necessary.

It is provided in a further embodiment of the invention that a changing gear is
5 fitted with the features according to the invention as mentioned above.

An embodiment of the invention will be explained in more detail below with reference to the drawings, in which:

10 Fig. 1 shows a changing gear in plan view;
Fig. 2 shows the changing gear in a further plan view;
Fig. 3 is a three-dimensional picture of the changing gear; and
Fig. 4 is a three-dimensional picture of a lever mechanism with a control
element.

15

The operation of a changing gear according to the invention will be explained below. Fig. 1 shows the changing gear with a first output member 2, a second output member 1, a changing wheel 3, an adjustment member 4, and a control element 7 in a position in
20 which the first output is driven. The changing wheel 3 is rotatably journaled on a pivot lever 5 and is in engagement with the rack 2 of the second output side. The pivot lever 5 can be pivoted by means of its catch pin 5a and the contour 4a of the adjustment member 4 when the adjustment member 4 is displaced against the direction of arrow A, so that the changing wheel 3 can be brought into engagement with the drive wheel 1 of the second output side.
25 This situation is visible in Fig. 2.

The first leg 6a of the spring 6 bears on the adjustment member 4 in point B, and the second leg 6b bears on the frame 10 in point C, so that the adjustment member 4 is forced in the direction of the arrow A. The turn of the spring 6 is retained on the adjustment member 4 by a mandrel 8. The control element 14 lies in front of the first leg 6a of the spring.
30 The control element 14 is coupled to the rack 2 by means of its dog 14a which lies in a rack opening 2a. In this switching position of the changing gear, a displacement of the rack 2 in a direction opposed to the arrow A has the result that the control element 14 will follow this movement, so that the edge D thereof approaches the first leg 6a and finally touches it. This is the extreme position up to which the rack 2 in its function as an output member can be

displaced. A further displacement of the control element 14 in a direction opposite to the arrow A is only possible if the width of the rack opening 2a of the rack 2 is greater than the width of the dog 14a, since a displacement of the rack 2 with the changing wheel 3 coupled thereto is not possible. Fig. 3 accordingly shows the changing gear in the first output position with the control element 14 and the dog 14a thereof coupled to the first output member 2, i.e. in the rack opening 2a thereof.

The displacement of the control element 14 against the arrow A has the result that the edge D of the element will occupy a position between the turn of the spring 6 and the point C on the first leg 6a of the spring. Since the effective lever arms on the spring legs 6a and 6b are of different lengths, the force between the control element 14 and the first leg 6a of the spring 6 is greater than the force between the second leg 6b and the frame point C. When the control element 14 is moved further, the turn of the spring 6, and accordingly also the adjustment member 4, will follow the movement of the control element 14 until the movement of the adjustment member 4 is stopped by an abutment. When the control element 14 moves still further after that, the first leg 6a will lift itself off its contact point B on the adjustment member 4 and will bear on the abutment with prestress. The switch-over process from the first output to the second output is completed thereby. Fig. 4 separately shows the lever mechanism with the control element 14, which is coupled by its dog 14a into the first output member 2 (not shown), and with a component of the third mechanism 5, by means of whose carrier block T2 the control element 14 can be operated by its catch T1 for switching the changing gear over.

CLAIMS:

1. A device for playing and storing several disc-shaped data carriers with changing facility, in particular CDs, CD-ROMs, and DVDs, with a playback unit designed for playing the data carrier and consisting substantially of a base plate, a frame plate, and springs and dampers arranged therebetween, a turntable arranged on the frame plate and supporting the data carrier, and a tensioning device for the data carrier, with a stacking unit serving for the intermediate storage of several data carriers and a loading unit serving for the bidirectional transport of the data carrier between the stacking unit and the playback unit as well as for moving the data carrier into and out of the device, characterized in that a changing gear is provided which has two alternate drive outputs, the first drive output (2) being designed inter alia for the function of adjusting a control member (14) which can be moved further from an extreme position of the first drive output (2) by means of a further drive, with the result that an adjustment member (4) carries out the switching-over operation.
2. A device as claimed in claim 1, characterized in that a changing wheel (3) which is rotatably journaled about a drive wheel (9) on a pivoting lever (5) can be adjusted by means of an adjustment member (4) which is kept in or brought into a first end position by a spring (6), as a result of which the first output side (2) of the changing gear is in engagement.
3. A device as claimed in one of the claims 1 and 2, characterized in that the spring (6) is constructed as a leg spring whose second leg (6b) is supported against a frame (10), whose turn or turns is/are supported on a mandrel (8) of the adjustment member (4), and whose first leg (6a) in said first end position is also supported against the adjustment member (4), such that the spring force acts with displacement effect on the adjustment member (4) from the second leg (6b) only, while the adjustment member (4) for the purpose of coupling the second output side of the changing gear by means of a control element (14), which acts on the first leg (6a) of the spring (6) and compensates the contact force thereof on the adjustment member (4), changes the balance of forces such that the spring force between the

control element (14) and the adjustment member (4) becomes greater than the spring force on the second leg (6b) and the frame (10), with the result that the adjustment member (4) moves towards the second end position until the second end position is reached, whereby the movement of the adjustment member (4) is blocked, whereas the first leg (6a) of the spring (6) is displaced further by the control element (14) and is thus lifted off the adjustment member (4) at point B.

4. A device as claimed in any one of the claims 1 to 3, characterized in that the coupling region between the first output member (2) and the control member (14) is constructed such that the first output member (2) and the control member (14) can move relative to one another in the direction of movement of the control member (14), and the resulting clearance space is utilized for coupling and uncoupling the first drive output side (2).

5. A changing gear, in particular for a device for playing and storing several disc-shaped data carriers, characterized in that said changing gear has two alternate drive outputs, the first drive output (2) being designed inter alia for the function of adjusting a control member (14) which can be moved further from an extreme position of the first drive output (2) by means of a further drive, with the result that an adjustment member (4) carries out the switching-over operation.

1/4

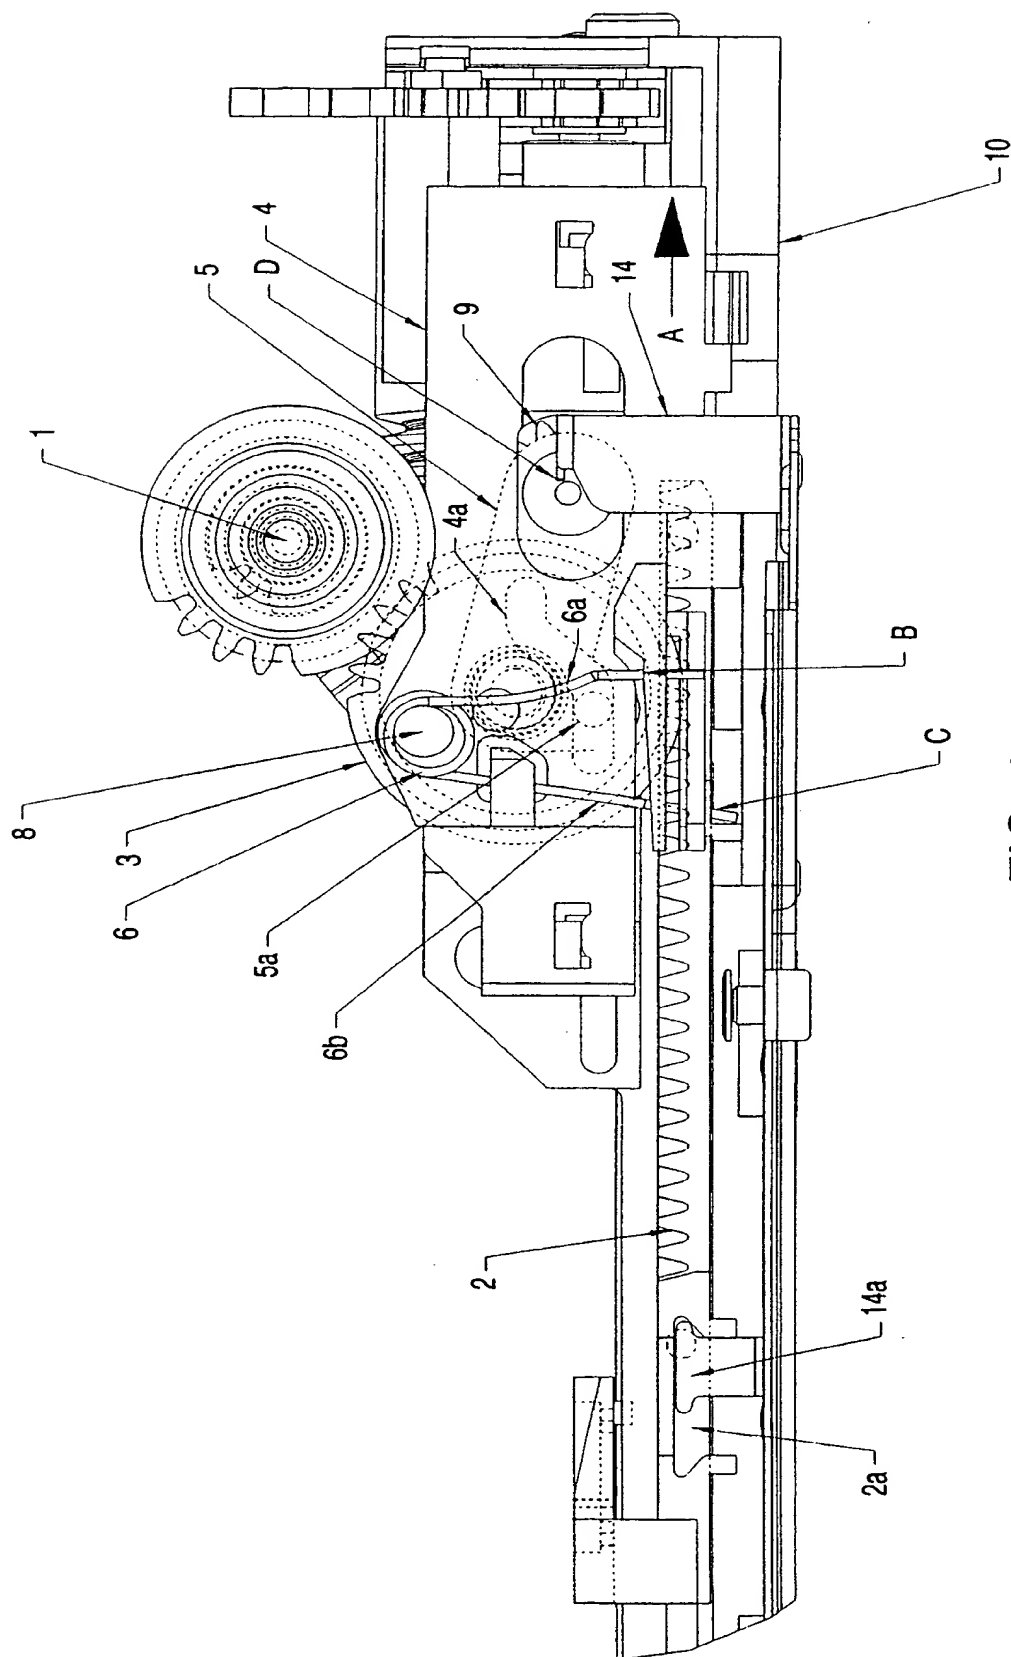


FIG. 1

2/4

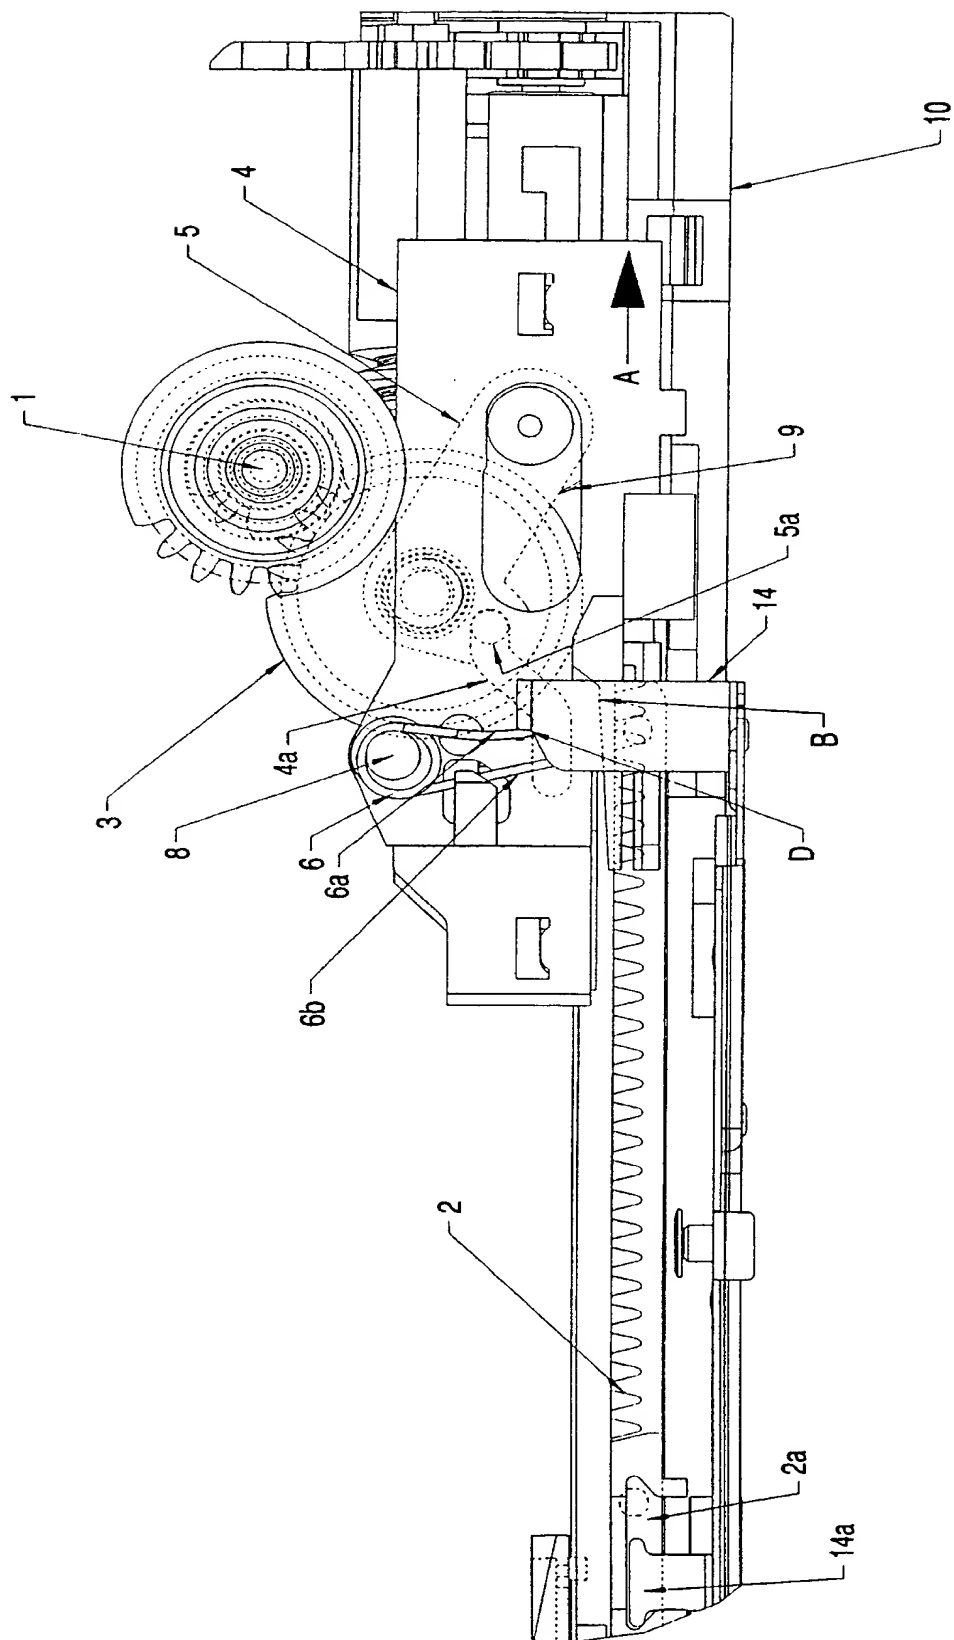


FIG. 2

3/4

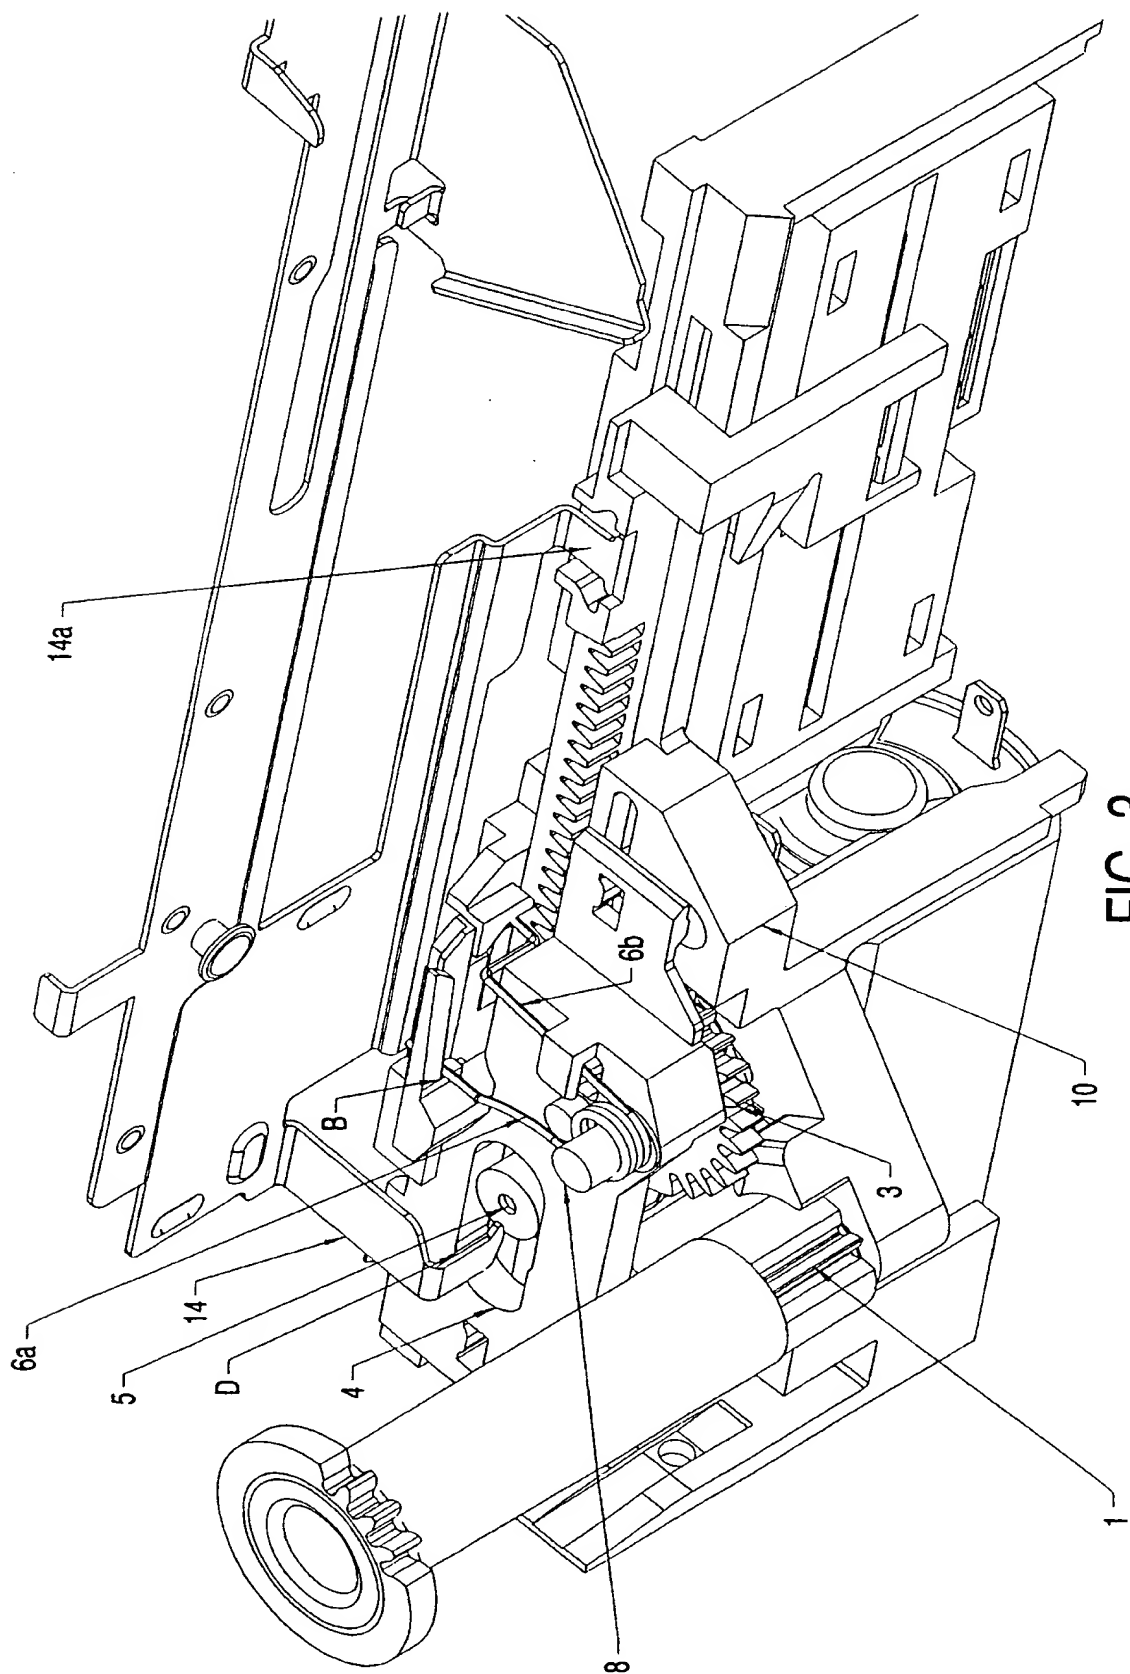


FIG. 3

4/4

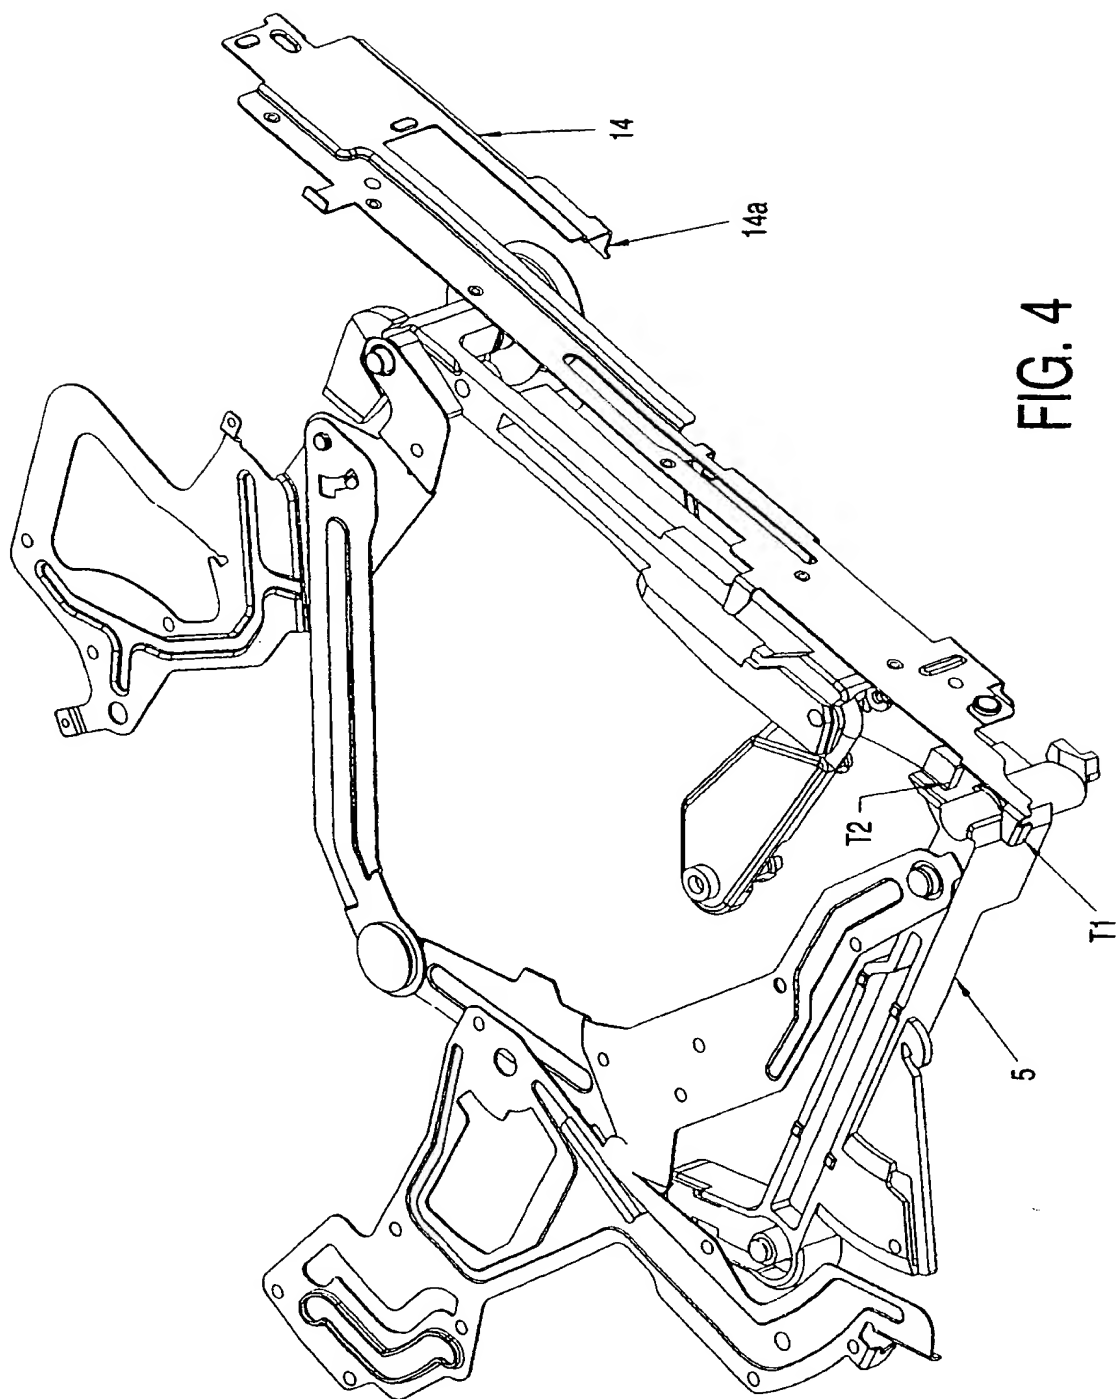


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/02178

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B17/22 G11B17/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 313 351 A (LEE CHUNG-GEU) 17 May 1994 (1994-05-17)	1,5
A	column 2, line 66 -column 4, line 2 ---	2-4
X,P	EP 0 926 667 A (CLARION CO LTD) 30 June 1999 (1999-06-30) column 14, line 39 -column 17, line 32; figures 1-6 ---	1,5
X,P	EP 0 905 688 A (MATSUSHITA ELECTRIC IND CO LTD) 31 March 1999 (1999-03-31) column 15, line 20 -column 18, line 8; figures 2,5,8,14-17 ---	1,5
A	EP 0 332 171 A (SANYO ELECTRIC CO) 13 September 1989 (1989-09-13) abstract -----	1-5



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 2000

Date of mailing of the international search report

21/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sozzi, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/02178

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5313351 A	17-05-1994	KR 9107430 B DE 3943332 A GB 2256739 A,B JP 2512574 B JP 3008188 A	26-09-1991 13-12-1990 16-12-1992 03-07-1996 16-01-1991
EP 0926667 A	30-06-1999	JP 11195262 A	21-07-1999
EP 0905688 A	31-03-1999	JP 11102563 A CN 1213134 A	13-04-1999 07-04-1999
EP 0332171 A	13-09-1989	JP 1227284 A JP 2573017 B CA 1319429 A DE 68923983 D DE 68923983 T KR 147065 B US 5119357 A	11-09-1989 16-01-1997 22-06-1993 05-10-1995 13-06-1996 15-10-1998 02-06-1992

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference PHD 99.027W0	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/EP 00/02178	International filing date (day/month/year) 10/03/2000	(Earliest) Priority Date (day/month/year) 11/03/1999
Applicant KONINKLIJKE PHILIPS ELECTRONICS N.V.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 2 sheets.

☒ It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.

☐ the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing :

☐ contained in the international application in written form.

☐ filed together with the international application in computer readable form.

☐ furnished subsequently to this Authority in written form.

☐ furnished subsequently to this Authority in computer readable form.

☐ the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.

☐ the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,

☒ the text is approved as submitted by the applicant.

☐ the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.

☒ as suggested by the applicant.

☐ because the applicant failed to suggest a figure.

☐ because this figure better characterizes the invention.

1
☐ None of the figures.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/02178

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G11B17/22 G11B17/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G11B F16H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 313 351 A (LEE CHUNG-GEU) 17 May 1994 (1994-05-17)	1,5
A	column 2, line 66 -column 4, line 2 ---	2-4
X,P	EP 0 926 667 A (CLARION CO LTD) 30 June 1999 (1999-06-30) column 14, line 39 -column 17, line 32; figures 1-6 ---	1,5
X,P	EP 0 905 688 A (MATSUSHITA ELECTRIC IND CO LTD) 31 March 1999 (1999-03-31) column 15, line 20 -column 18, line 8; figures 2,5,8,14-17 ---	1,5
A	EP 0 332 171 A (SANYO ELECTRIC CO) 13 September 1989 (1989-09-13) abstract -----	1-5



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 June 2000

Date of mailing of the international search report

21/06/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Sozzi, R

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/02178

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5313351	A	17-05-1994	KR 9107430 B	26-09-1991
			DE 3943332 A	13-12-1990
			GB 2256739 A, B	16-12-1992
			JP 2512574 B	03-07-1996
			JP 3008188 A	16-01-1991
EP 0926667	A	30-06-1999	JP 11195262 A	21-07-1999
EP 0905688	A	31-03-1999	JP 11102563 A	13-04-1999
			CN 1213134 A	07-04-1999
EP 0332171	A	13-09-1989	JP 1227284 A	11-09-1989
			JP 2573017 B	16-01-1997
			CA 1319429 A	22-06-1993
			DE 68923983 D	05-10-1995
			DE 68923983 T	13-06-1996
			KR 147065 B	15-10-1998
			US 5119357 A	02-06-1992